



iPad Mini 2 Wi-Fi Front Panel Replacement

prereq only

Written By: Sam Lionheart



INTRODUCTION

prereq only



TOOLS:


- [iFixit Opening Picks set of 6](#) (1)
- [iOpener](#) (1)
- [Phillips #00 Screwdriver](#) (1)
- [Spudger](#) (1)
- [Tweezers](#) (1)



PARTS:



- [iPad mini & mini 2 Adhesive Strips](#) (1)

Step 1 — Front Panel

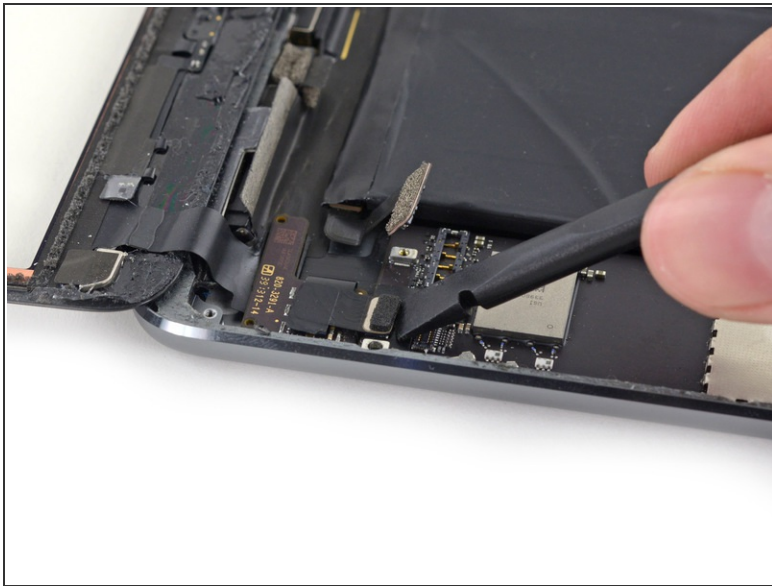

- Use the flat end of a spudger to lift the digitizer cable connector straight up off of its socket.

Step 2

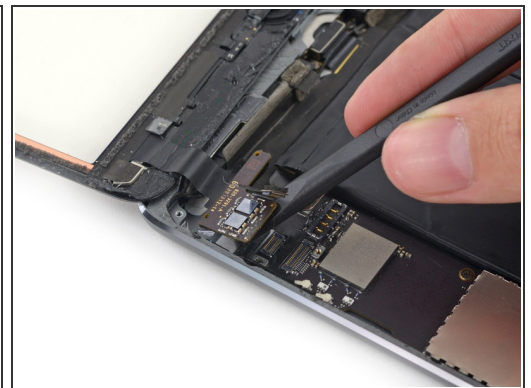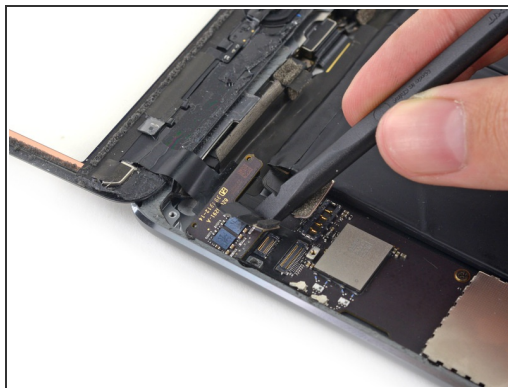

- Slide the spudger under the battery side of the digitizer board to begin separating it from the rear case.
- Lift the digitizer board up to free the last of the adhesive.

Step 3



- Lift and remove the front panel from the iPad.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-04 10:27:30 AM.